


# Product data sheet

**Higo - L615A**  
Male front panel mount connector



L615AG C 03 DR 0300  
<https://ac-solutions-2024.digitaledoeners.be/en/product/l615agc03dr0300>

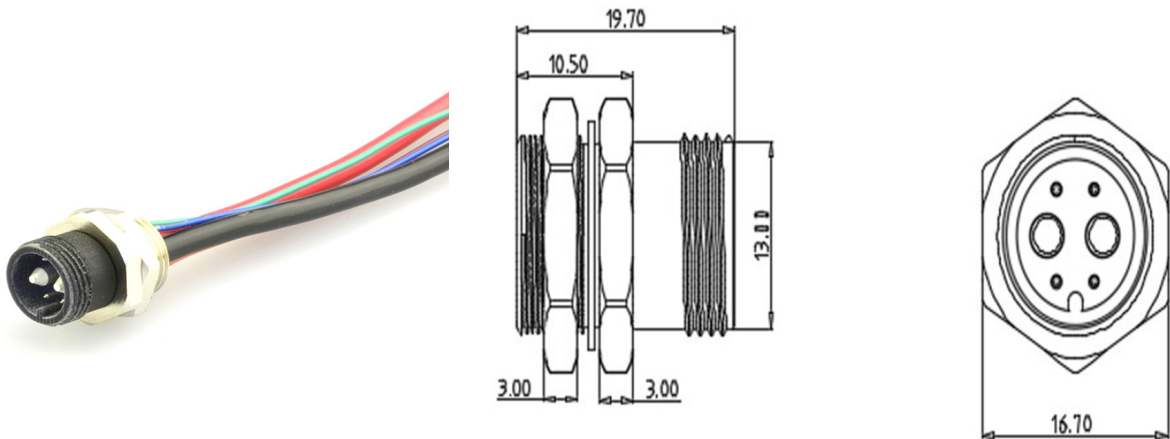

## Specifications

### General Characteristics

|                    |                                    |
|--------------------|------------------------------------|
| Number of contacts | 6(2+4)                             |
| Connector shape    | Panel mount                        |
| Gender             | Male                               |
| Color              | Black                              |
| Upper temperature  | 80 °C                              |
| Lower temperature  | -25 °C                             |
| IP Protection      | IP67                               |
| Mating cycles      | 200 Times                          |
| Connector diameter | 16.7 mm                            |
| Cable Length       | Single wires 300                   |
| Wire section       | 2 x 4,0 + 4 x 0,2                  |
| Remark             | Other cable length/type on request |

# Product data sheet

## Higo - L615A

Male front panel mount connector



### Electrical Parameters

|                            |                   |
|----------------------------|-------------------|
| Rated current              | 40 / 2 A          |
| Rated voltage              | 48 V AC / 60 V DC |
| Max. insulation resistance | ?20 M?            |
| Max. contact resistance    | ?10 m?            |

### Material

|                     |                  |
|---------------------|------------------|
| Insulation wire     | PVC              |
| Material of contact | Phosphor bronze  |
| Contact plating     | Gold over Nickel |