


# Product data sheet

Higo - Z1115A  
Male cable connector



Z1115AG P 00 DU 1000  
<https://ac-solutions-2024.digitaledoeners.be/nl/product/z1115agp00du1000>

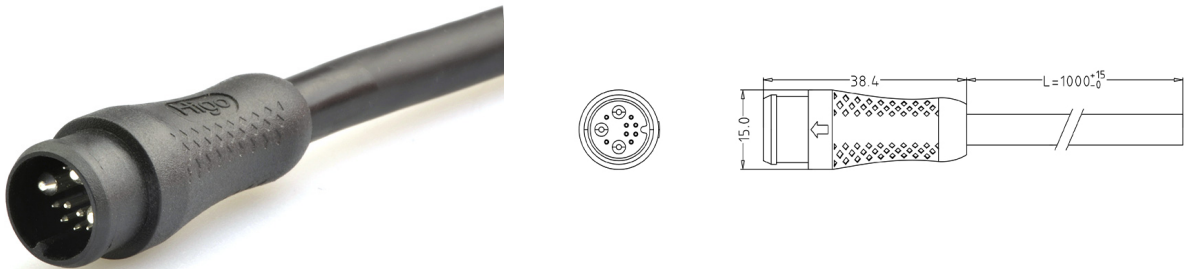

## Specificaties

### General Characteristics

|                       |                                    |
|-----------------------|------------------------------------|
| Number of contacts    | 11 (3+8)                           |
| Connector shape       | Plug                               |
| Gender                | Male                               |
| Color                 | Black                              |
| Upper temperature     | 80 °C                              |
| Lower temperature     | -25 °C                             |
| Protection degree     | IP67                               |
| Mating cycles (times) | 200 Times                          |
| Connector diameter    | 15 mm                              |
| Fitting length        | 70 mm                              |
| Cable Length          | 1000 mm                            |
| Cable diameter        | 7.5 mm                             |
| Wire section          | 3 x 2,5 + 8 x 0,14                 |
| Remark                | Other cable length/type on request |

# Product data sheet

## Higo - Z1115A

Male cable connector



### Electrical Parameters

|                                 |                   |
|---------------------------------|-------------------|
| Rated current                   | 25 / 2 A          |
| Rated voltage                   | 48 V AC / 60 V DC |
| Max. insulation resistance (M?) | ?20 M?            |
| Max. contact resistance (M?)    | ?10 m?            |

### Material

|                     |                  |
|---------------------|------------------|
| Material jacket     | PVC              |
| Insulation wire     | PTFE             |
| Material of contact | Copper Alloy     |
| Contact plating     | Gold over Nickel |